

## Ventouses métalliques

Ø 35 à 300 mm



F43-MP 35 / 60 / 100 / 150 / 200 / 300


### Caractéristiques

- Utilisée pour des surfaces irrégulières et rugueuses
- Convient pour la préhension de produits concaves


Embout	Ø	Plan	Force en daN à 0,9 bar*	Volume en cm <sup>3</sup>	Références
					EPDM
Sans Insert	35	-	3,57	6	F43-MP3540X
	60	-	11,07	20	F43-MP6040X
	80	-	22	-	F43-MP8040X
	100	-	33,67	55	F43-MP10040X
	150	-	69	125	F43-MP15040X
	200	-	137,75	543	F43-MP20040X
	300	-	326,53	1285	F43-MP30040X
Femelle G1/8	35	1	3,57	6	F43-MP354018F
	60	2	11,07	20	F43-MP604018F
	80	4	22	-	F43-MP804018F
	100	-	33,67	55	F43-MP1004018F
Femelle G1/2	80	5	22	-	F43-MP804012F
	100	3	33,67	55	F43-MP1004012F
	150	6	69	125	F43-MP1504012F
Femelle G3/4	200	-	137,75	543	F43-MP2004034F
	300	-	326,53	1285	F43-MP3004034F

\*Coefficient de sécurité de 2.


Plan 1




Plan 2




Plan 3

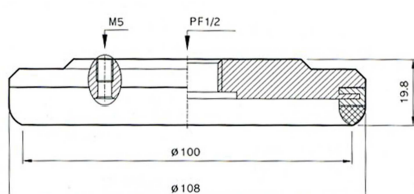

Plan 4



Plan 5



Plan 6

